

All that remains is to **turn the key 90 degrees anti-clockwise and remove.**

Whichever you are using...

Store tools and materials in an orderly fashion, where heavier items will not damage fragile items. **Tools should have their blades or drill bits removed.**

EQUIPMENT CARE

Never push the equipment beyond its design limits. That is to say, use the store only for the purpose it was designed for. **If you need to store LPG gas or Chemicals you have the wrong store for the job.** Ask at your local HSS Hire Shop for advice.

Keep the equipment clean. You will find this less of a chore if you clean up regularly, rather than wait until the end of the hire period.

When not in use, **store the equipment somewhere clean, dry and safe** from thieves.

FINISHING OFF

Remove all items stored and give the safe / box a final clean ready for return to your local HSS Hire Shop.




...any comments?

If you have any suggestions to enable us to improve the information within this guide please fax your comments or write to the Product Manager at the address below

Fax: 0181-687 5001

Operating & Safety Guide 847

HSS Hire Shops

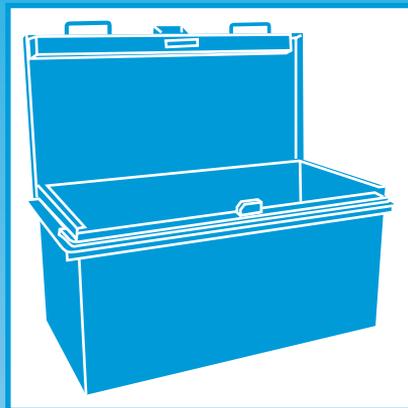

Secure Tool Stores

For storing tools on-site, safe from unauthorised users, thieves and the weather.

©HSS Hire Service Group Plc 1998 No. 847/01

Group Office: 25 Willow Lane, Mitcham, Surrey CR4 4TS

Web Site: <http://www.hss.co.uk>

Code 50700 / 50705

GENERAL SAFETY

For advice on the safety and suitability of this equipment contact your local HSS Hire Shop.

This equipment should be used by an able bodied, competent adult who has read and understood these instructions. Anyone with either a temporary or permanent disability, should seek expert advice before using it.

  Never use this equipment if you are ill, feeling tired, or under the influence of alcohol or drugs.

Do not use the store for flammable gases or liquids.

The tool box and tool safe are designed to be used for the storage of tools and equipment. Do NOT use to store LPG gas, fuel (petrol / diesel etc.), explosives or corrosive / dangerous chemicals.

HSS offer for hire Chemical Stores or a Folding Security Cage for the safe storage of Chemicals or LPG gas. For full details contact your local HSS Hire Shop.

Check the condition of the equipment before use. If it shows signs of damage or excessive wear, return it to your local HSS Hire Shop.

GETTING STARTED

Choose a suitable site for the store where the ground is level and able to support its weight and contents without subsidence.

Avoid surfaces such as Tarmacadam, which softens in direct sunlight.

Where practicable, have the store resting on pallet timbers to raise it just above ground level. This will protect the base from mud and rain water.

Ideally the store should be protected by a secondary roof to ensure the contents are kept dry.

USING THE STORE


THE KEY!

The most important thing to organise is of course the key/s. Choose a person to take responsibility for its/their safe keeping and who will be available at all times. Agree where the key/s should be kept, and when using the tool safe, keep a note of the hire contract number, the branch telephone number, the key number and the 'E' code engraved on the lid of the safe.

If you loose the key, DO NOT try to force the lid open. The Site Box padlocks should be cut free from the hasp and staples. Where as the Tool Safe key can be replaced, simply contact your local HSS Hire Shop for advice.

Contract No	
Branch Tel No	
Key No	
E Code	


Site Box

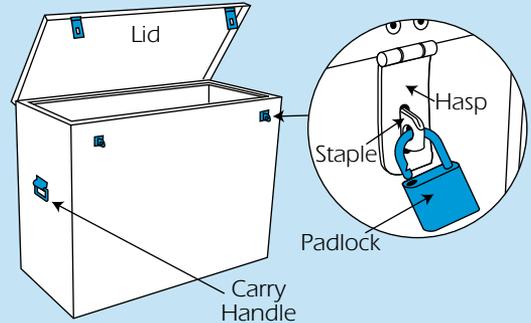

Site Box...

This unit will require 2 padlocks, these should be attached to the hasp and staples fitted to the unit.

Tool Safe

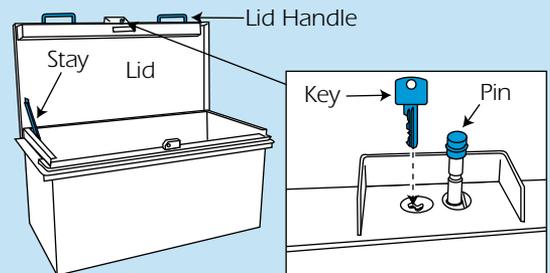

Tool Safe...

The tool safe is supplied with the lock fitted and with the appropriate key. The lock is a manual movement type, designed to be operated only with the key. The lock mechanism has no spring loaded action, and can't be locked accidentally.

To unlock the safe, insert the key, turn it 90 degrees clockwise then withdraw the pin as far as it will go. You may either leave the key in this position, or return it to its original position and remove.

You can now raise the lid, making sure that it is supported by the stay.

To lock the safe ensure the pin is fully withdrawn, disengage the stay and slowly lower the lid.

Insert the key and turn 90 degrees clockwise, then push the pin fully in.